

佛山市汇隆新能源技术有限公司

HILONG BATTERY TECHNOLOGY CO., LTD.



高倍率聚合物锂离子电池和镍氢电池制造专家

High Discharge Li-Po and Ni-MH Battery Manufacturer Experts



COMPANY INTRODUCTION

公司简介

Hilong Battery Technology Co., Ltd was founded in 2002, we are an advanced technology company specialized in the research and production of Lithium Polymer battery, Ni-MH battery and LiFePO4 battery, with excellent performance, stable quality, reasonable price, and good service, our batteries are accepted by more and more electric products, such as electric vehicle, RC hobby, airsoft gun, power tool, medical device, vacuum cleaner, lighting, electric equipment, UPS and energy storage etc.

Hilong is located in Lingnan Foshan, China, adjacent to the provincial capital Guangzhou. We have a complete industrial chain of power lithium battery and Ni MH battery, from cell production to back-end pack, and master a complete set of core technology. We have decades of superb battery production technology and insist on independent research and development, innovation, manufacturing and sales of batteries. So far, our sales network covers most areas of Asia, Europe, America, Australia and other foreign countries. Most of our customers have cooperate with us for over 19 years and we have won many world-class enterprises widely recognized and long-term cooperation.

Hilong is committed to accelerating scientific innovation, reducing manufacturing costs, strengthening the prevention and control of key process nodes, restraining the damage caused by out of control of product safety and reliability, realizing precision design and successfully completing high-quality forging.

Hilong is not only a battery manufacturer, but also a solution provider offering customized battery solutions to meet customers' needs for integrated battery customization. We can fulfil various requirements, either voltage or size, or capacity. Our techniques are not bound on parameters we displayed. Please feel free to consult our experts to design a unique battery solution.

Hilong's mission is to provide our customers with total energy solutions which is green, safe and efficient. We uphold the managing creed of work in unity, achieve technological innovation, insist on customer first, quality oriented, believe win-win situation is the best cooperative principle. Based on these beliefs, we are confident to offer our customer good quality and good service.

佛山市汇隆新能源技术有限公司成立于2002年，汇隆是一家专业从事聚合物锂电池、镍氢电池、磷酸铁锂电池研发和生产的高科技公司。凭借卓越的性能，稳定的质量，合理的价格和良好的服务，我们的电池被越来越多的电子产品所接受和应用，比如电动车，RC遥控模型，枪模，电动工具，医疗设备，吸尘器，灯具，电子设备，UPS和储能等等。


汇隆新能源技术有限公司位于中国岭南—佛山，毗邻省会广州。我们拥有从电池生产到后端包装的完整动力锂电池和镍氢电池产业链，掌握了一整套核心技术。我们拥有数十年精湛的电池生产技术，坚持自主研发、创新、生产、销售电池。目前，我们的销售网络已覆盖亚洲、欧洲、美洲、澳大利亚和其它国家。大部分客户与我们合作超过19年，并赢得了众多世界级企业的广泛认可和长期合作。

汇隆新能源致力于加速科学创新、降低制造成本、加强关键工艺节点防控、抑制因产品安全可靠性能失控带来的损害，实现精工设计，成功完成精品锻造。


汇隆不仅是一家电池制造商，更是一家为客户提供定制化电池解决方案的专家，以满足客户的集成电池定制需求，无论是电压或电池大小，或容量。我们的技术不受所显示参数的限制。请随时咨询我们的专家，设计独特的电池解决方案。

公司秉承“团结协作、科技创新”的经营理念，坚持“顾客至上,品质为本”的经营方针,信守“成人成己”的企业合作宗旨,为客户提供品质优良的产品及优质高效的服务,为员工创造激发潜能和与企业共同成长的平台,与客户建立共赢未来的伙伴关系。

Lipo Battery Cell Solution 锂电池解决方案

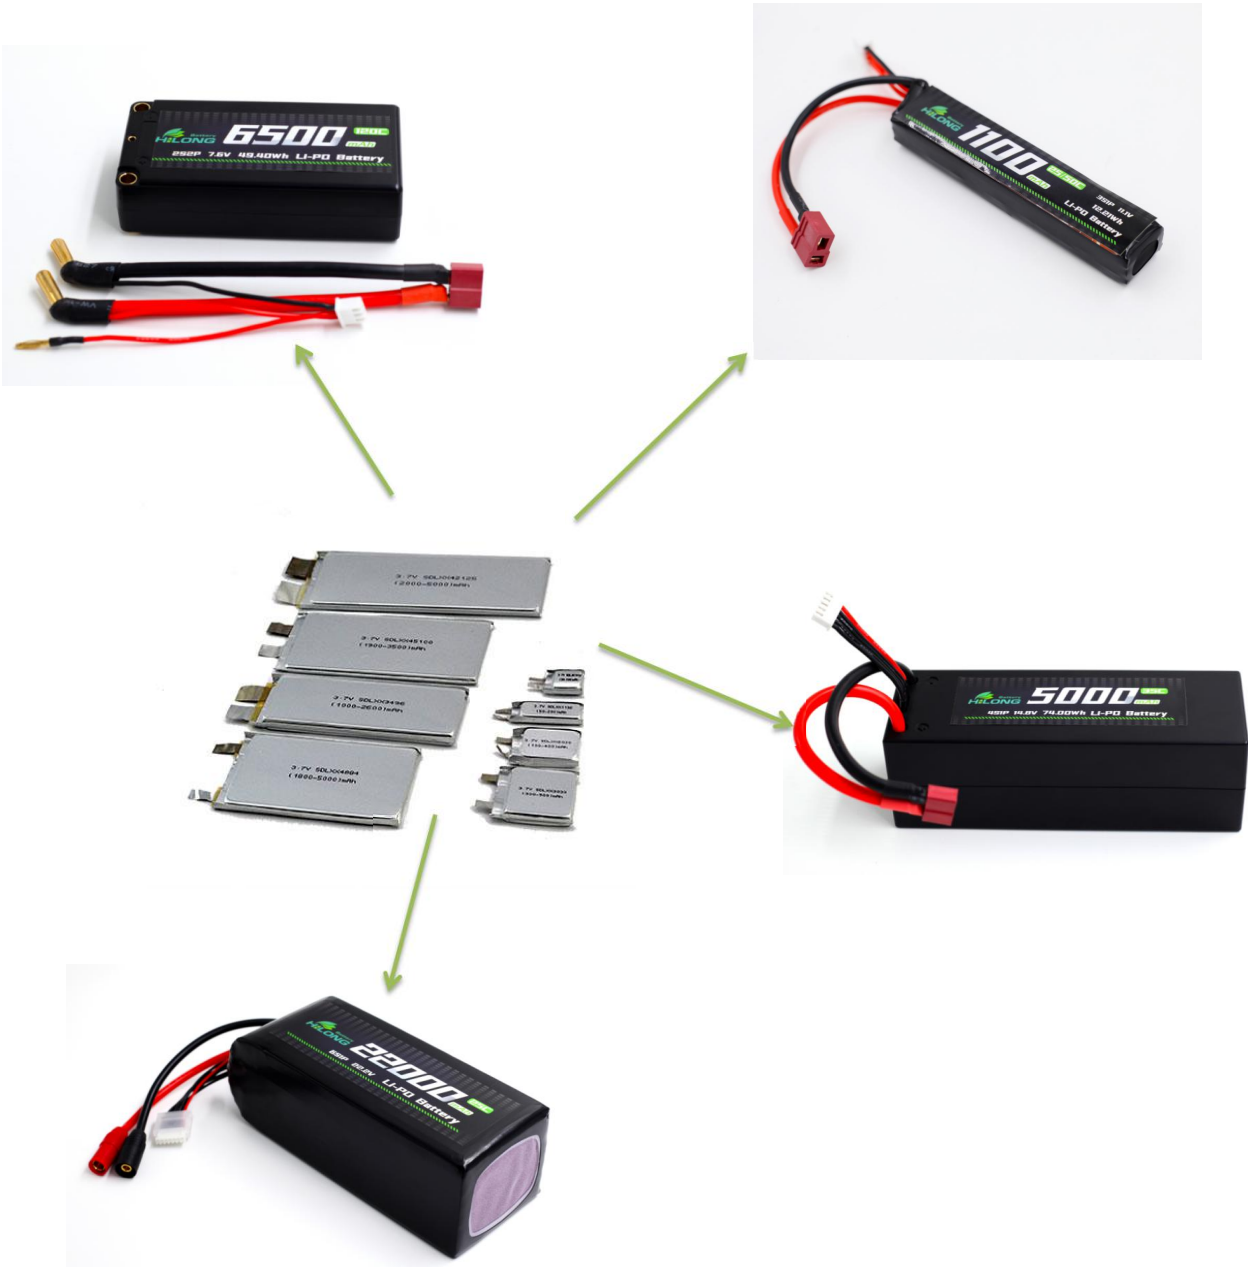

NI-MH Battery Cell Solution 镍氢电池解决方案

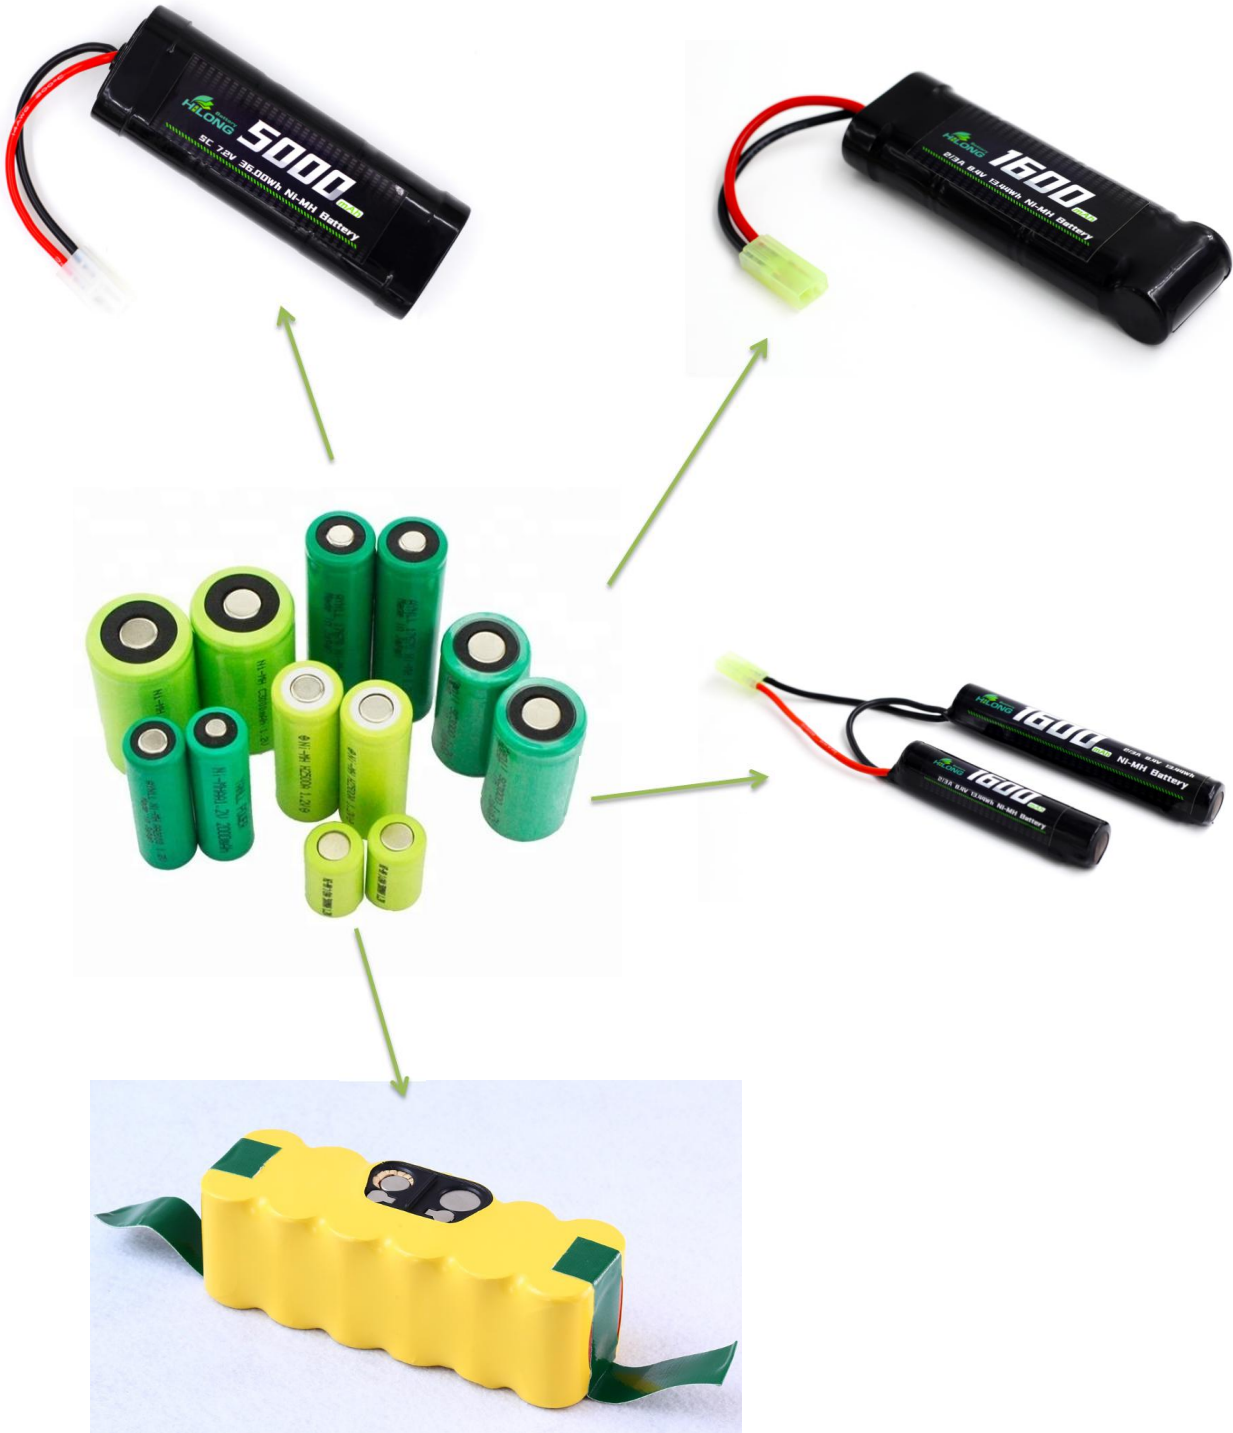

Hilong Battery Application 电池应用



Hilong NI-MH High Power Battery Specification 镍氢电池规格

No.	Model No.	Nominal Voltage (V)	Nominal Capacity(mAh)	Demension(mm)		Cont. Discharge Current(A)	Max. Discharge Current(A)	Rapid Charge	
				Diameter	Height			Current(mA)	Time(h)
1	HL-4/5SC2400P	1.2V	2400	22.5	34.0	24.0	26.0	2400	1.2
2	HL-SC1300P	1.2V	1300	22.5	43.0	13.0	15.0	1300	1.2
3	HL-SC1500P	1.2V	1500	22.5	43.0	15.0	18.0	1500	1.2
4	HL-SC1800P	1.2V	1800	22.5	43.0	18.0	20.0	1800	1.2
5	HL-SC2000P	1.2V	2000	22.5	43.0	20.0	22.0	2000	1.2
6	HL-SC2200P	1.2V	2200	22.5	43.0	22.0	24.0	2200	1.2
7	HL-SC2500P	1.2V	2500	22.5	43.0	24.0	26.0	2500	1.2
8	HL-SC2700P	1.2V	2700	22.5	43.0	27.0	30.0	2700	1.2
9	HL-SC3000P	1.2V	3000	22.5	43.0	30.0	33.0	3000	1.2
10	HL-SC3300P	1.2V	3300	22.5	43.0	30.0	33.0	3300	1.2
11	HL-SC3600P	1.2V	3600	23.0	44.0	35.0	38.0	3600	1.2
12	HL-SC3800P	1.2V	3800	23.0	44.0	35.0	40.0	3800	1.2
13	HL-SC4000P	1.2V	4000	23.0	44.0	35.0	42.0	4000	1.2
14	HL-SC4200P	1.2V	4200	23.0	44.0	35.0	45.0	4200	1.2
15	HL-SC4300P	1.2V	4300	23.0	44.0	35.0	45.0	4300	1.2
16	HL-SC4500P	1.2V	4500	23.0	44.0	35.0	48.0	4500	1.2
17	HL-SC5000P	1.2V	5000	23.0	44.0	35.0	50.0	5000	1.2
18	HL-SC5300P	1.2V	5300	23.0	44.0	35.0	53.0	5300	1.2
19	HL-2/3A1300P	1.2V	1300	17.0	29.0	14.0	18.0	1300	1.2
20	HL-2/3A1600P	1.2V	1600	17.0	29.0	16.0	20.0	1600	1.2
21	HL-4/5A2000P	1.2V	2000	17.0	43.0	20.0	22.0	2000	1.2
22	HL-4/5A2200P	1.2V	2200	17.0	43.0	22.0	25.0	2200	1.2
23	HL-2/3AA750P	1.2V	750	14.1	29.0	7.5	8.0	750	1.2
24	HL-AA1300P	1.2V	1300	14.1	50.0	13.0	15.0	1300	1.2
25	HL-AA1600P	1.2V	1600	14.1	50.0	16.0	18.0	1600	1.2
26	HL-AA1800P	1.2V	1800	14.2	50.5	18.0	20.0	1800	1.2
27	HL-AA2000P	1.2V	2000	14.2	50.5	20.0	22.0	2000	1.2
28	HL-AAA800P	1.2V	800	10.2	44.5	8.0	10.0	800	1.2
29	HL-C5500P	1.2V	5500	25.3	50.0	35.0	55.0	5500	1.2
30	HL-C6000P	1.2V	6000	25.3	50.0	40.0	60.0	6000	1.2
31	HL-D8000P	1.2V	8000	32.2	60.0	50.0	100.0	4000	2.25
32	HL-D9000P	1.2V	9000	32.2	60.0	60.0	100.0	4500	2.25
33	HL-D10000P	1.2V	10000	32.2	60.0	70.0	100.0	5000	2.25
34	HL-D12000P	1.2V	12000	32.2	60.0	80.0	100.0	6000	2.25
35	HL-F14000P	1.2V	14000	32.2	90.0	100.0	120.0	7000	2.25
36	HL-F15000P	1.2V	15000	32.2	90.0	100.0	130.0	7500	2.25





Hilong Power RC Car Lipo Specification 车模锂电规格

No.	Model No.	Typical capacity (mAh)	Voltage (V)	Hard Case Dimensions			Approx Weight (±5%g)	Max Discharge Data	
				T ±5%mm	W ±5%mm	L ±5%mm		Continuous Discharge Current (C)	Burst Discharge Current (C)
1	HL-2200/35-2S1P	2200	7.4	25.0	47.0	138.0	158.0	35C	70C
2	HL-2200/35-3S1P	2200	11.1	25.0	47.0	138.0	215.0	35C	70C
3	HL-2200/35-4S1P	2200	14.8	25.0	47.0	138.0	175.0	35C	70C
4	HL-2600/35-2S1P	2600	7.4	25.0	47.0	138.0	181.0	35C	70C
5	HL-2600/35-3S1P	2600	11.1	25.0	47.0	138.0	247.0	35C	70C
6	HL-2600/35-4S1P	2600	14.8	25.0	47.0	138.0	312.0	35C	70C
7	HL-3300/35-2S1P	3300	7.4	25.0	47.0	138.0	225.0	35C	70C
8	HL-3300/35-3S1P	3300	11.1	25.0	47.0	138.0	302.0	35C	70C
9	HL-3300/35-4S1P	3300	14.8	35.0	47.0	138.0	385.0	35C	70C
10	HL-3700/35-2S1P	3700	7.4	25.0	47.0	138.0	226.0	35C	70C
11	HL-3700/35-3S1P	3700	11.1	25.0	47.0	138.0	318.0	35C	70C
12	HL-3700/35-4S1P	3700	14.8	35.0	47.0	138.0	405.0	35C	70C
13	HL-4200/35-2S1P	4200	7.4	25.0	47.0	138.0	259.0	35C	70C
14	HL-4200/35-3S1P	4200	11.1	35.0	47.0	138.0	355.0	35C	70C
15	HL-4200/35-4S1P	4200	14.8	35.0	47.0	138.0	452.0	35C	70C
16	HL-5000/35-2S1P	5000	7.4	25.0	47.0	138.0	300.0	35C	70C
17	HL-5000/35-3S1P	5000	11.1	35.0	47.0	138.0	432.0	35C	70C
18	HL-5000/35-4S1P	5000	14.8	45.0	47.0	138.0	564.0	35C	70C
19	HL-6600/35-2S2P	6600	7.4	35.0	47.0	138.0	385.0	35C	70C
20	HL-8400/35-2S2P	8400	7.4	35.0	47.0	138.0	452.0	35C	70C
21	HL-10000/35-2S2P	10400	7.4	45.0	47.0	138.0	564.0	35C	70C
22	HL-5200/50-2S1P	5200	7.4	25.0	46.5	138.0	281.5	50C	100C
23	HL-5200/50-3S1P	5200	11.1	35.0	46.5	138.0	412.0	50C	100C
24	HL-5200/50-4S1P	5200	14.8	45.0	46.5	138.0	544.0	50C	100C
25	HL-5400/50-2S1P	5400	7.4	25.0	46.5	138.0	297.0	50C	100C
26	HL-5400/50-3S1P	5400	11.1	35.0	46.5	138.0	424.0	50C	100C
27	HL-5400/50-4S1P	5400	14.8	45.0	46.5	138.0	551.5	50C	100C
28	HL-7200/50-2S1P	7200	7.4	25.0	46.5	138.0	320.0	50C	100C
29	HL-7200/50-3S1P	7200	11.1	38.0	46.5	138.0	450.0	50C	100C
30	HL-7200/50-4S1P	7200	14.8	48.0	46.5	138.0	580.0	50C	100C



Hilong Power High Voltage Lipo Specication 高压锂电规格

No.	Model No.	Typical capacity (mAh)	Voltage (V)	Hard Case Dimensions			Approx Weight (±5%g)
				T ±5%mm	W ±5%mm	L ±5%mm	
1	HL-5200/130-4S1P HV	5200	15.2	38.2	47.0	139.0	470.0
2	HL-6000/130-2S1P HV	6000	7.6	19.5	47.0	139.0	245.0
3	HL-6500/120-2S2P HV	6500	7.6	25.0	46.5	138.0	284.0
4	HL-6500/120-3S2P HV	6500	11.4	38.0	46.5	138.0	399.0
5	HL-6500/120-4S2P HV	6500	15.2	48.0	46.5	138.0	513.0
6	HL-6550/130-4S1P HV	6550	15.2	48.2	47.0	139.0	540.0
7	HL-6600/130-1S1P HV	6600	3.8	18.5	47.0	93.0	155.0
8	HL-6800/130-2S1P HV	6800	7.6	22.5	47.0	139.0	285.0
9	HL-7500/120-2S1P HV	7500	7.6	25.0	46.5	138.0	312.0
10	HL-7500/120-3S1P HV	7500	11.4	38.0	46.5	138.0	438.0
11	HL-7500/120-4S1P HV	7500	15.2	48.0	46.5	138.0	564.0
12	HL-8200/120-2S1P HV	8200	7.6	25.0	46.5	138.0	338.0
13	HL-8200/120-3S1P HV	8200	11.4	38.0	46.5	138.0	475.0
14	HL-8200/120-4S1P HV	8200	15.2	48.0	46.5	138.0	610.0
15	HL-8200/130-2S1P HV	8200	7.6	25.1	47.0	139.0	318.0
16	HL-8800/90-1S1P HV	8800	3.8	18.5	47.0	93.0	155.0
17	HL-4400/120-2S2P (Shorty Pack) HV	4400	7.6	25.0	46.5	95.5	212.0
18	HL-5000/120-2S2P (Shorty Pack) HV	5000	7.6	25.0	46.5	95.5	236.0
19	HL-5800/120-2S1P (Shorty Pack) HV	5800	7.6	25.0	46.5	95.5	249.0
20	HL-6500/90-2S2P (Shorty Pack) HV	6500	7.6	25.1	47.0	96.0	225.0
21	HL-4800/130-2S2P (Shorty Pack) HV	4800	7.6	25.1	47.0	96.0	205.0
22	HL-4800/90-2S2P (Shorty Pack) HV	4800	7.6	20.0	47.0	96.0	165.0
23	HL-3600/130-2S1P (Shorty Pack) HV	3600	7.6	18.5	47.0	93.0	155.0
24	HL-6300/90-4S1P (Shorty Pack) HV	6300	15.2	48.2	47.0	99.0	445.0





Hilong Power Airsoft Gun Lipo Specification 枪模锂电规格

No.	Item no.	Volt (V)	Capacity (mAh)	Size (mm)	Shape	Weight (g)
1	HL-2*552036P	7.4V	250	42*21*11mm	Stick	20
2	HL-3*752036P	11.1V	350	41*20.5*15mm	Stick	22
3	HL-2*383048P	7.4V	400	9*30*50mm	Stick	28
4	HL-2*551770P	7.4V	560	74.3*17.3*11.8mm	Stick	32
5	HL-2*602562P	7.4V	800	66*26*13mm	Stick	44
6	HL-3*602562P	11.1V	800	71*26*17.3mm	Stick	62
7	HL-2*4018163P	7.4V	900	167*19*9mm	Stick	55
8	HL-3*4018163P	11.1V	900	167*19*13.5mm	Stick	84
9	HL-2*551890P	7.4V	900	95*20*14mm	Stick	52
10	HL-3*551890P	11.1V	900	95*20*19mm	Stick	72
11	HL-2*5520100P	7.4V	1000	103*20*11.2mm	Stick	52
12	HL-2*5520100P	7.4V	1000	103*20*5.5mm*2	Twin	52
13	HL-3*5520100P	11.1V	1000	103*20*16.3mm	Stick	72
14	HL-3*5520100P	11.1V	1000	103*20*5.5mm*3	Triple	72
15	HL-2*4814178P	7.4V	1000	185*14.5*11mm	Stick	60
16	HL-3*4814178P	11.1V	1000	185*14.5*16mm	Stick	84
17	HL-2*3817178P	7.4V	1000	9*17*190mm	Stick	60
18	HL-3*3817178P	11.1V	1000	12*17*190mm	Stick	84
19	HL-2*553456P	7.4V	1000	61*35*12.5mm	Stick	52
20	HL-3*553456P	11.1V	1000	61*35*18mm	Stick	72
21	HL-2*453090P	7.4V	1000	93.3*30.5*10mm	Stick	60
22	HL-3*453090P	11.1V	1000	93.3*30.5*15.5mm	Stick	84
23	HL-3*5514178P	11.1V	1000	15*15*185mm	Stick	84
24	HL-3*483457P	11.1V	1000	15*35*60mm	Stick	82
25	HL-2*604257P	7.4V	1200	62*42*14.5mm	Stick	68
26	HL-3*604257P	11.1V	1200	62*42*19mm	Stick	96
27	HL-2*7016108P	7.4V	1200	15*16.5*116mm	Stick	68
28	HL-3*7016108P	11.1V	1200	22*16.5*116mm	Stick	96
29	HL-2*7016108P	7.4V	1200	7.0*16.5*116*2	Twin	70
30	HL-2*5520120P	7.4V	1300	130*21*12.2mm	Stick	62
31	HL-2*5520120P	7.4V	1300	130*21*6.1mm*2	Twin	64
32	HL-3*5520120P	11.1V	1300	130*21*18mm	Stick	86
33	HL-3*5520120P	11.1V	1300	130*21*6.1mm*3	Triple	88
34	HL-3*5520120P	11.1V	1300	130*21*6.1mm+130*21*12.2mm	1S+2S pack	88
35	HL-2*5517178P	7.4V	1300	190*17*12mm	Stick	68
36	HL-3*5517178P	11.1V	1300	190*17*18mm	Stick	96
37	HL-2*7520100P	7.4V	1300	103*20*16mm	Stick	68
38	HL-2*7520100P	7.4V	1300	103*20*7.5mm*2	Twin	70
39	HL-2*753462P	7.4V	1300	67*35*15mm	Stick	72
40	HL-3*753462P	11.1V	1300	67*35*23mm	Stick	102

Hilong Power Airsoft Gun Lipo Specification 枪模锂电规格

No.	Item no.	Volt (V)	Capacity (mAh)	Size (mm)	Shape	Weight (g)
41	HL-2*503496P	7.4V	1300	102*35*11mm	Stick	75
42	HL-3*503496P	11.1V	1300	102*35*17mm	Stick	105
43	HL-3*503496P	11.1V	1300	5*35*102mm+10*35*102mm	1S+2S pack	105
44	HL-2*504562P	7.4V	1300	65*42*14.5mm	Stick	75
45	HL-3*504562P	11.1V	1300	65*42*17mm	Stick	105
46	HL-2*801890P	7.4V	1300	95*18.3*16.8mm	Stick	72
47	HL-3*503496P	11.1V	1300	5.5*35*100mm+10.3*35*100mm	1S+2S pack	105
48	HL-2*553090P	7.4V	1300	11*31*96mm	Stick	76
49	HL-3*553090P	11.1V	1300	16*31*96mm	Stick	108
50	HL-2*751890P	7.4V	1300	16*20*96mm	Stick	72
51	HL-3*751890P	11.1V	1300	24*20*96mm	Stick	102
52	HL-2*751890P	7.4V	1300	7.5*18*96mm*2	Twin	105
53	HL-2*6018163P	7.4V	1500	167*19*15mm	Stick	78
54	HL-3*6018163P	11.1V	1500	167*19*20mm	Stick	111
55	HL-2*633090P	7.4V	1500	6.5*30*96mm*2	Twin	90
56	HL-3*633090P	11.1V	1500	6.5*30*96mm*3	Triple	128
57	HL-3*633090P	11.1V	1500	18*30*96mm	Stick	126
58	HL-2*603480P	7.4V	1600	15*34*94mm	Stick	82
59	HL-3*603480P	11.1V	1600	19.5*34*94mm	Stick	118
60	HL-2*653496P	7.4V	1800	105*35*14mm	Stick	100
61	HL-3*653496P	11.1V	1800	105*35*21mm	Stick	144
62	HL-2*9020120P	7.4V	2000	126*21*19.8mm	Stick	96
63	HL-2*9020120P	7.4V	2000	126*21*10.2mm*2	Twin	98
64	HL-3*9020120P	11.1V	2000	126*21*28mm	Stick	138
65	HL-2*753090P	7.4V	2000	93.3*30.5*16.5mm	Stick	138
66	HL-3*9020122P	11.1V	2000	19*19*122+10*19*122mm	1S+2S pack	140
67	HL-3*9020122P	11.1V	2000	10*19*122mm*3	Triple	140
68	HL-2*904257P	7.4V	2100	62*42*19mm	Stick	140
69	HL-2*753496P	7.4V	2200	16*33*102mm	Stick	112
70	HL-3*753496P	11.1V	2200	24*34*102mm	Stick	162
71	HL-2*4844125P	7.4V	2800	11.3*42*131mm	Stick	165
72	HL-3*4844125P	11.1V	2800	16.5*43*130mm	Stick	206
73	HL-2*5544125	7.4V	3300	12*43*133mm	Stick	172
74	HL-2*6048145P	7.4V	4000	13.5*43*148mm	Stick	205



Hilong Power Agriculture Drone Lipo Specification 植保机锂电规格

No.	Model No.	Typical capacity (mAh)	Voltage (V)	Hard Case Dimensions			Approx Weight (±5%g)	Max Discharge Data	
				T ±5%mm	W ±5%mm	L ±5%mm		Continuous Discharge Current	Burst Discharge Current
1	HL-5200/25-6S	5200	22.2V	58.0	45.0	135.0	717.0	25C(130.0A)	50C(260.0A)
2	HL-6000/25-6S	6000	22.2V	55.8	49.0	155.0	872.0	25C(150.0A)	50C(300.0A)
1	HL-8000/25-6S	8000	22.2V	51.0	60.0	166.0	1143.0	25C(200.0A)	50C(400.0A)
2	HL-10000/15-6S	10000	22.2V	66.0	60.0	166.0	1251.2	15C(150.0A)	30C(300.0A)
1	HL-10000/25-6S	10000	22.2V	49.0	90.0	166.0	1413.0	25C(250.0A)	50C(500.0A)
2	HL-13000/25-6S	13000	22.2V	68.0	71.0	181.0	1575.0	25C(325.0A)	50C(650.0A)
1	HL-16000/25-6S	16000	22.2V	70.0	76.0	171.0	2002.0	25C(400.0A)	50C(800.0A)
2	HL-21000/15-6S	21000	22.2V	48.5	97.0	245.0	2541.0	15C(315.0A)	30C(630.0A)
1	HL-22000/25-6S	22000	22.2V	67.0	92.0	196.0	2500.0	25C(550.0A)	50C(1100.0A)
2	HL-23000/25-6S	23000	22.2V	69.0	73.0	208.0	2613.0	25C(575.0A)	50C(1150.0A)



Hilong Power Aircraft Lipo Specification 航模锂电规格

No.	Model No.	Typical capacity (mAh)	Voltage (V)	Hard Case Dimensions			Approx Weight (±5%g)	Max Discharge Data	
				T ±5%mm	W ±5%mm	L ±5%mm		Continuous Discharge	Burst Discharge Current
1	1300/45-3S	1300	11.1V	20.5	35.0	72.0	102.0	45C(58.5A)	90C(117.0A)
2	1500/25-3S	1500	11.1V	26.0	34.0	72.0	126.0	25C(37.5A)	50C(75.0A)
3	1800/35-3S	1800	11.1V	21.1	35.0	103.0	151.5	35C(63.0A)	70C(126.0A)
4	2200/25-3S	2200	11.1V	22.9	35.0	103.5	192.0	25C(55.0A)	50C(110.0A)
5	2200/50-3S	2200	11.1V	25.5	35.0	104.0	206.0	50C(100.0A)	100C(200.0A)
6	2600/50-4S	2600	14.8V	21.8	44.0	134.0	275.2	50C(130.0A)	100C(260.0A)
7	3300/45-6S	3300	22.2V	44.4	44.0	135.0	555.0	45C(148.5A)	90C(297.0A)
8	4000/35-6S	4000	22.2V	39.6	49.0	155.0	618.0	35C(140.0A)	70C(280.0A)
9	4200/35-6S	4200	22.2V	50.0	45.0	135.0	612.0	35C(147.0A)	70C(294.0A)
10	1300/65-4S	1300	14.8V	30.0	35.0	72.0	155.0	65C(84.5A)	130C(169.0A)
11	1500/65-4S	1500	14.8V	28.5	35.0	90.0	175.0	65C(97.5A)	130C(195.0A)
12	2700/65-4S	2700	14.8V	26.0	44.0	138.0	320.0	65C(175.0A)	130C(350.0A)
13	3300/65-6S	3300	22.2V	48.0	44.0	138.0	580.0	65C(214.5A)	130C(429.0A)
14	4500/65-6S	4500	22.2V	49.0	48.0	158.0	780.0	65C(292.5A)	130C(585.0A)
15	5200/65-6S	5200	22.2V	55.0	50.0	160.0	860.0	65C(338.0A)	130C(676.0A)



Hilong FPV Graphene Lipo Battery Specification FPV穿越机锂电规格

No.	Model No.	Typical capacity (mAh)	Voltage (V)	Hard Case Dimensions			Approx Weight (±5%g)	Max Discharge Data	
				T ±5%mm	W ±5%mm	L ±5%mm		Continuous Discharge Current	Burst Discharge Current
1	HL-1000/80-3S GR	1000	11.1V	21.0	35.0	72.0	115.0	80C(80.0A)	160C(160.0A)
2	HL-1000/80-4S GR	1000	14.8V	27.0	35.0	72.0	145.0	80C(80.0A)	160C(160.0A)
3	HL-1300/80-3S GR	1300	11.1V	25.5	35.0	72.0	135.0	80C(104.0A)	160C(208.0A)
4	HL-1300/80-4S GR	1300	14.8V	33.0	35.0	72.0	175.0	80C(104.0A)	160C(208.0A)
5	HL-1300/80-5S GR	1300	18.5V	41.0	35.0	72.0	212.0	80C(104.0A)	160C(208.0A)
6	HL-1500/80-3S GR	1500	11.1V	29.5	35.0	72.0	152.0	80C(120.0A)	160C(240.0A)
7	HL-1500/80-4S GR	1500	14.8V	38.0	35.0	72.0	192.0	80C(120.0A)	160C(240.0A)
8	HL-1500/80-5S GR	1500	18.5V	48.0	35.0	72.0	238.0	80C(120.0A)	160C(240.0A)



Note: As the products are continually updated, the pictures and technical parameters of products are based on order or delivery of the actual conditions. We will not make a further notice if the contents have to be changed.

注：由于产品不断升级更新，产品图片及各类电池技术参数以订购或发货时的实际情况为准，如有变更，恕不另行通知！

佛山市汇隆新能源技术有限公司 HILONG BATTERY TECHNOLOGY CO., LTD.

公司地址：广东省佛山市顺德区陈村镇广隆工业区兴业三路四号

Address: No.4 Xingye 3rd Rd Guanglong Industrial Area
Chencun Town, Shunde District, Foshan Guangdong China

TEL: 86-757-83838851 FAX: 86-757-83838852

Email: info@hilongbattery.com

Website: www.hilongbattery.com